



MODEL 88

Display Tortilla Cooking Center

Technical Specifications


PATENT NUMBERS:

4,508,025

4,569,851

4,683,813

Vent Pipe Exhaust Hood

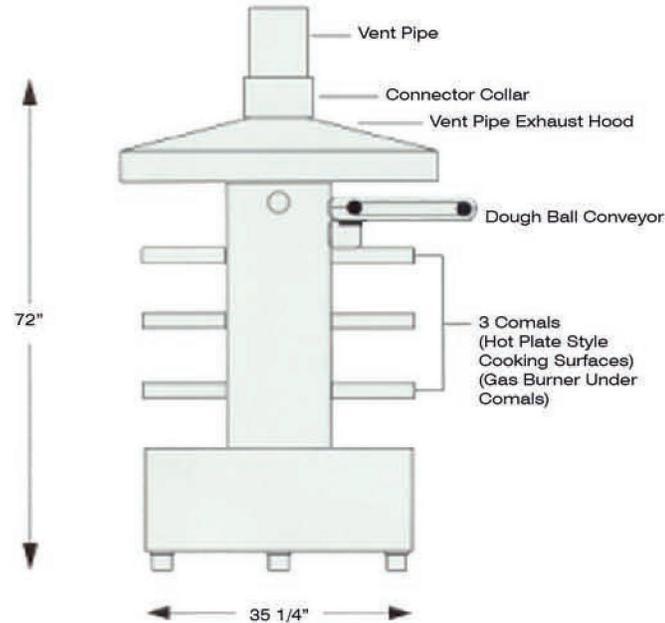

ELECTRICAL

- 120 V, 15 amp, 60 Hz
- Connect directly inside breaker box located in lower center of machine

GAS

- 3 burner, 60,000 total BTU
- 3/4" NPT located underneath machine

MINIMUM CLEARANCES (Griddle)

- Wall: 15" Combustible, 7" Noncombustible
- Floor: 7" Combustible and Noncombustible
- Installation access: 36"W x 63"H

VENTING

- Hot plate classification, powered vent, fan required
- Vent in accordance with local codes, 800 CFM recommended
- Vent pipe exhaust hood and connector collar adapts to 8" vent pipe 69" from floor
- Open top exhaust hood for other ceiling mounted vent systems

SHIPPING

- Weight: 775 lb.
- Class: 110

CERTIFICATION

- CSA Class 2712-86 (ANSI Z83. 11-2013)
- NSF Standard 4

X-PRESS MANUFACTURING

271 FM 306

NEW BRAUNFELS, TEXAS 78130

PH: (830) 629-2651 FAX: (830) 620-4727

E-MAIL: sales@x-pressmfg.com

Visit our website at: www.x-pressmfg.com